




# ENDURAMAT 2440 X 1220MM



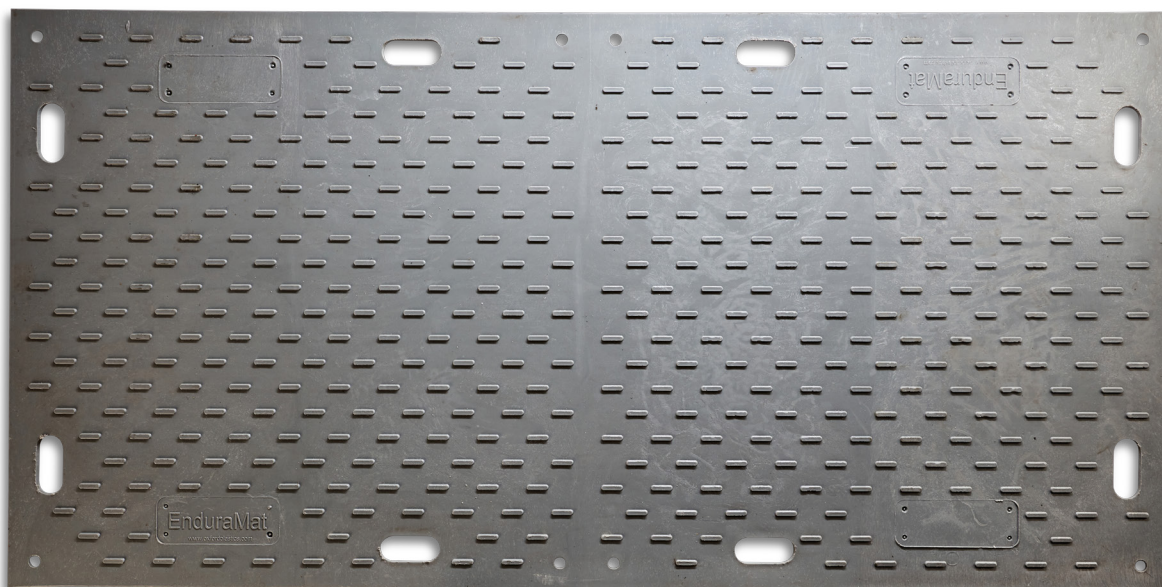

# CONTENTS

## PAGE

3	<b>Features and benefits</b>
4	<b>What problems does it solve?</b>
5	<b>Dimensions and weight</b>
6	<b>Material composition and product life</b>
7	<b>Slip resistance</b>
8	<b>Product usage</b>
9	<b>Inspection and maintenance</b>
10	<b>Installation</b>
11	<b>Recyclability</b>
12	<b>Associated products</b>
13	<b>Contact information</b>






## FEATURES AND BENEFITS

HOLES TO CONNECT  
MULTIPLE ENDURAMATS

CUT OUT HAND HOLDS

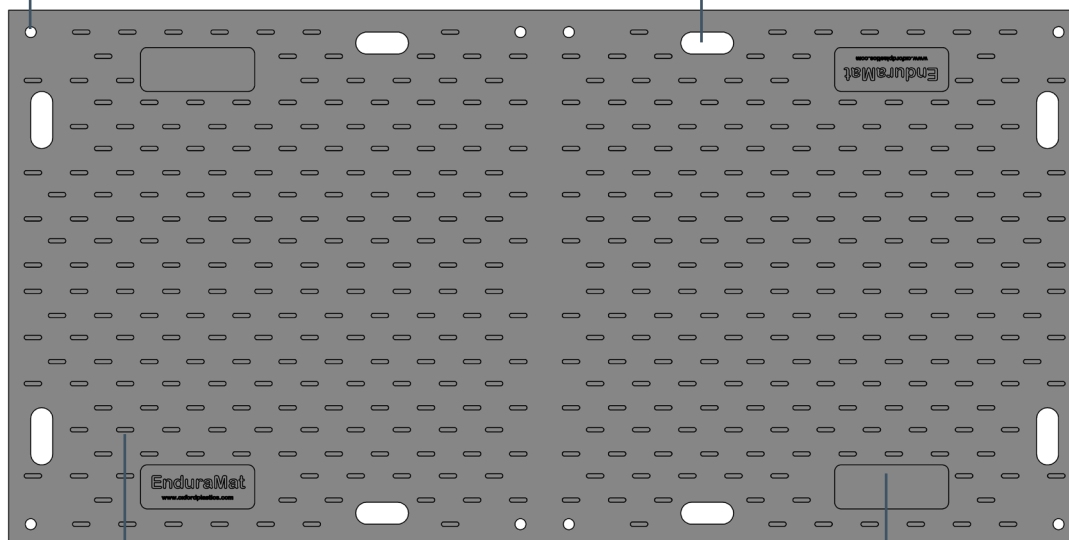

HARD-WEARING SLIP  
RESISTANT TEXTURE

SPACE FOR ENGRAVED  
CUSTOMER LOGO

### ROBUST

Create stable ground conditions for heavy vehicles.

Integral slip resistant texture.

Advanced HDPE technology construction, robust and durable.

Proven to work in temperatures +50°C / 120°F to -30°C / -20°F.

Non-metal construction reduces theft.

### SAFE & EASY TO USE

Can be manually handled without the need for heavy lifting equipment.

Quick to install.

Ability to connect multiple EnduraMats with light duty and heavy duty couplers.

Different tread patterns on each side, for pedestrian traffic or vehicle traffic.

### EXTRAS

Can be customised with customer logos, MOQs apply.

Colour customisable, MOQs apply.



## WHAT PROBLEMS DOES IT SOLVE?



### GROUND PROTECTION

Enable access for heavy vehicles while protecting ground conditions.

Create semi-permanent roadways on soft ground using heavy duty couplers.

Create portable passageways on soft ground using light duty couplers.

### CREATE ACCESS

Demarcate walkways and thoroughfares to avoid hazards.

Signpost to inform, educate and navigate pedestrians.

### VERSATILITY

Manually installed mats.


Can be used to protect the ground or provide access in poor conditions.

Light enough to be lifted and moved on the work site.



## DIMENSIONS AND WEIGHTS

### ENDURAMAT 32Kg / 71lbs

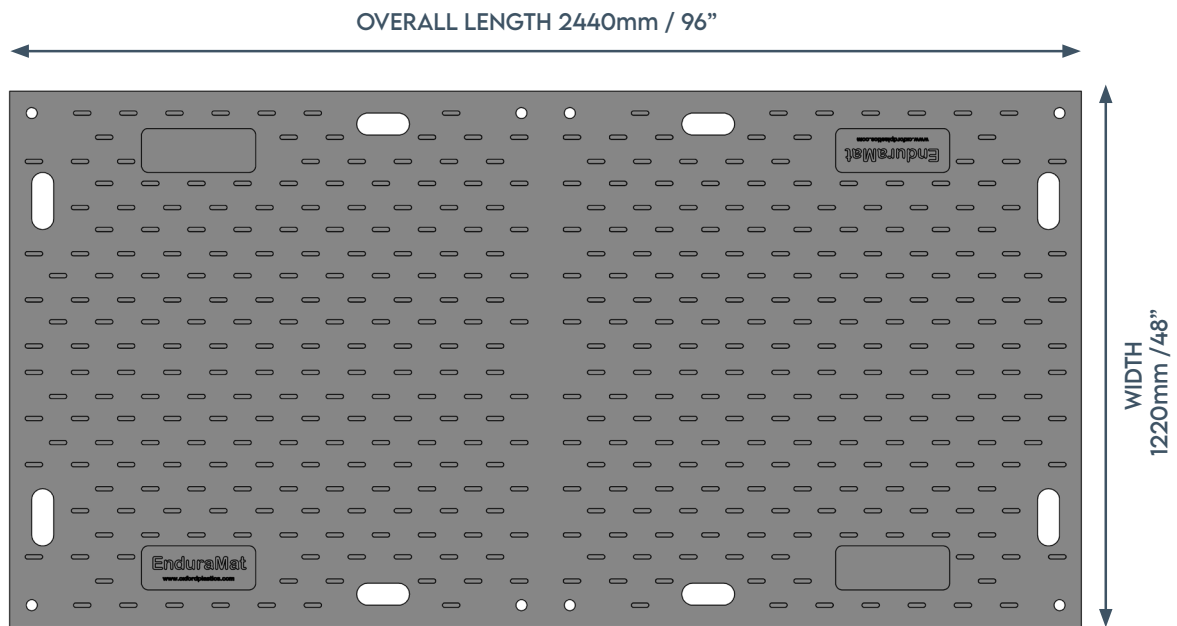

HEIGHT  
12mm / 0.5"



Part Name	Product Code	Height	Width	Length
EnduraMat 2440 x 1220mm	O651	12mm / 0.5"	1220mm / 48"	2440mm / 96"
Light Duty Coupler	O652	3mm / 0.1"	132mm / 5"	95mm / 4"
Heavy Duty Coupler	O648	8mm / 0.3"	178mm / 7"	178mm / 7"




## MATERIAL COMPOSITION AND PRODUCT LIFE

All elements use materials that if maintained correctly will not structurally degrade in UV light, in the presence of water or salts, and are stable in temperatures from +50°C / +120°F to -30°C / -20°F.

### CUSTOM COLOUR

EnduraMat 2440 is manufactured from 85% recycled material as standard.

Virgin material must be used for colour customisations. MOQs also apply for colour customisation.

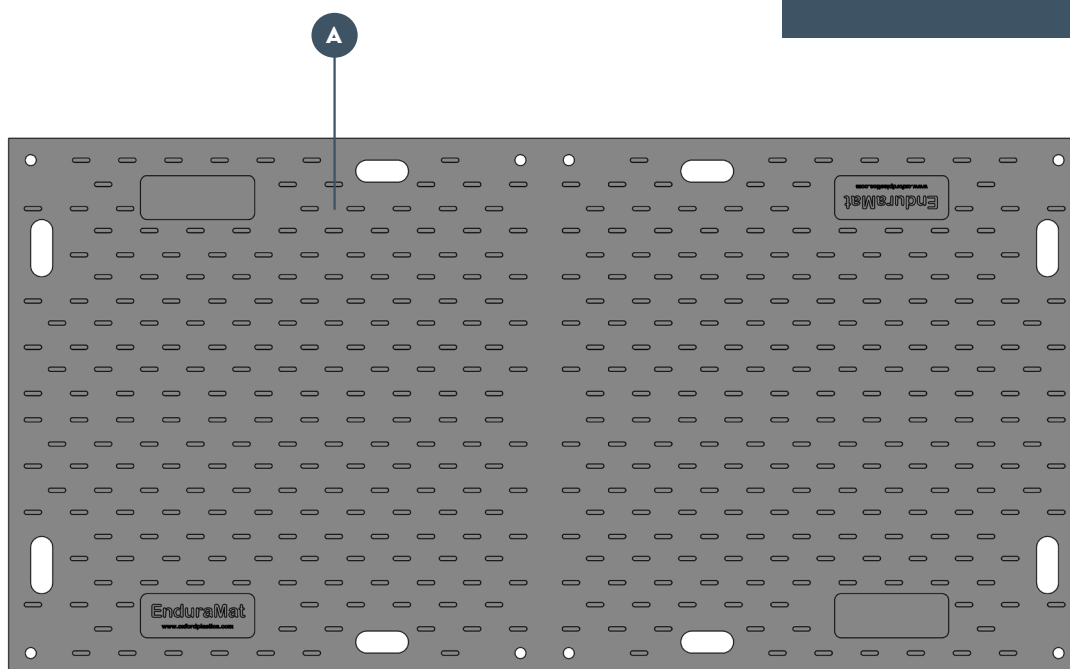


	Part Name	Material
A	Main Body	Recycled plastic



## SLIP RESISTANCE

Slip Resistance testing has been carried out by an independent test house, in line with the requirements of UK HSE 2012 document 'Testing the slip resistance of flooring'.

Testing was carried out in 3 directions in wet and dry conditions, using a calibrated Munro slip tester using Slider 55 and Slider 96.

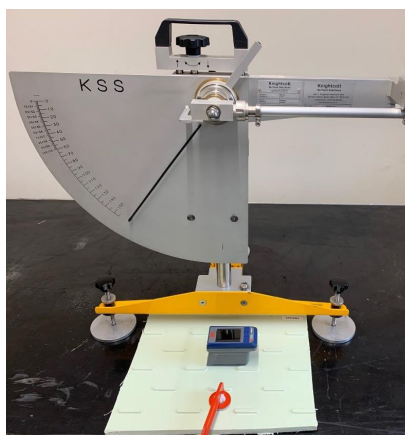

### CLASSIFICATIONS

High Slip Potential  
0-24

Medium Slip Potential  
25-35

Low Slip Potential  
36+

#### SLIDER 96 TEST RESULTS - DRY

	Median Result	Classification
Parallel to traffic	60	LOW SLIP POTENTIAL
45 degrees to traffic	64	LOW SLIP POTENTIAL
Perpendicular to traffic	68	LOW SLIP POTENTIAL

#### SLIDER 96 TEST RESULTS - WET

Parallel to traffic	34	MODERATE SLIP POTENTIAL
45 degrees to traffic	40	LOW SLIP POTENTIAL
Perpendicular to traffic	34	MODERATE SLIP POTENTIAL

#### SLIDER 55 TEST RESULTS - DRY

Parallel to traffic	87	LOW SLIP POTENTIAL
45 degrees to traffic	91	LOW SLIP POTENTIAL
Perpendicular to traffic	114	LOW SLIP POTENTIAL


#### SLIDER 55 TEST RESULTS - WET

Parallel to traffic	30	MODERATE SLIP POTENTIAL
45 degrees to traffic	37	LOW SLIP POTENTIAL
Perpendicular to traffic	39	LOW SLIP POTENTIAL





## PRODUCT USAGE

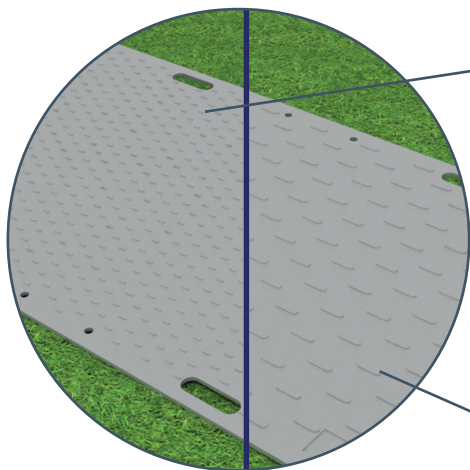



EnduraMat has two different slip resistant textures. On one side is a tread pattern suitable for heavy vehicles and the other side has a tread pattern more suitable for pedestrian usage.



Safe for pedestrian use.



Safe for heavy vehicles.

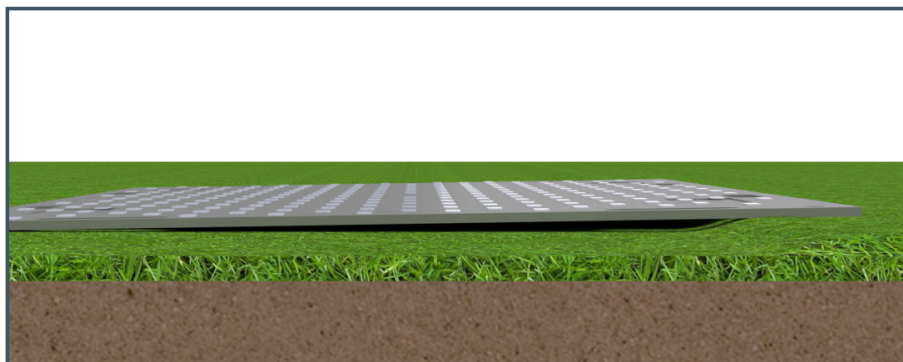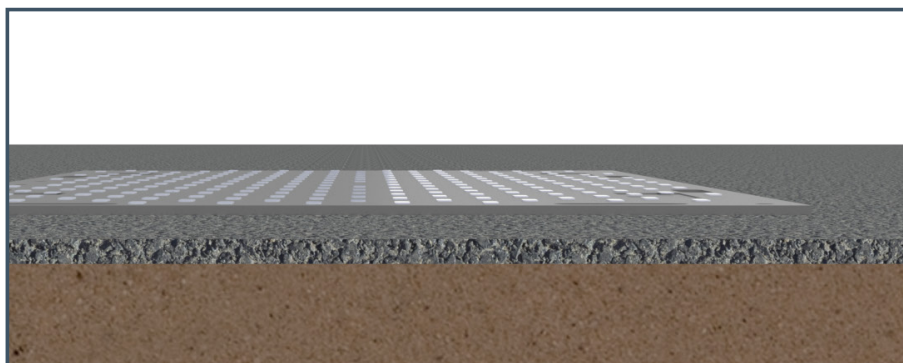

### GROUND CONDITIONS


The product is suitable for use on good, even ground conditions as well as heavily uneven or soft ground too.





## INSPECTION AND MAINTENANCE


Care for the product by following the below guidance:

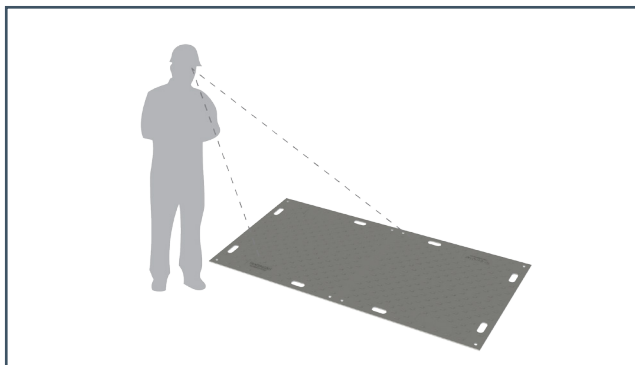

Inspect each product for signs of damage, between every installation.



Clean product between every installation to remove debris, and to maintain slip resistance properties.

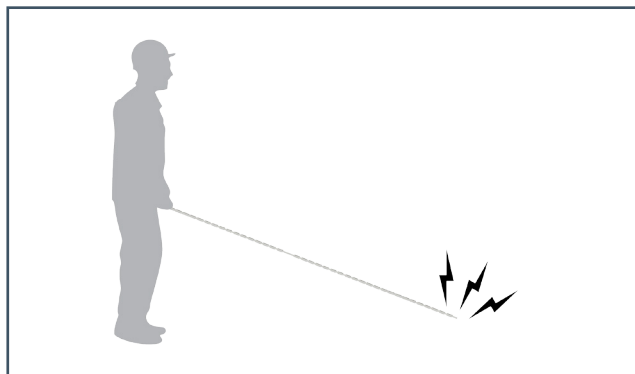

Do not drop the product.  
Do not lift or move with machinery.

### SIGNS OF DAMAGE

Cracks in material indicate it has been damaged through improper use.

If product shows signs of damage, it should be disposed of and recycled.

### MAINTENANCE

EnduraMats should be free from mud and other debris.

Ensure that EnduraMat is cleaned after each use with a brush and/or water.




## INSTALLATION AND SAFE HANDLING

Follow the process below for safe and effective installations.


Risk assessments should be carried out to ensure the usage is suitable for the scenario.




Assess conditions of the ground and traffic passing over the EnduraMats.

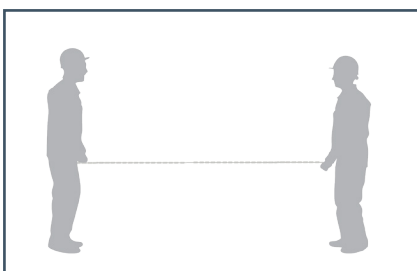


Two person lift.

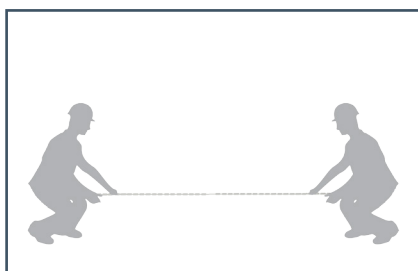


Bend at the knees in line with best practise.

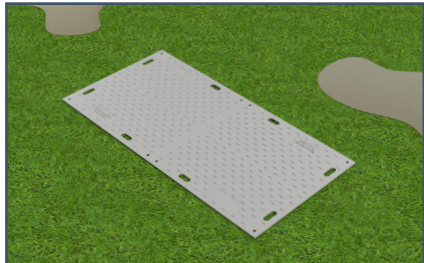


Position product onto area requiring ground protection.

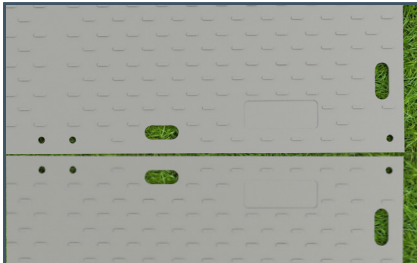

Depending on traffic and conditions connect multiple EnduraMats with either light or heavy duty coupler.

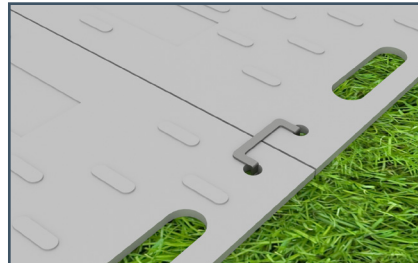


When using the Light Duty coupler, place one end of the coupler into the first Enduramat and then the second into the second Enduramat.

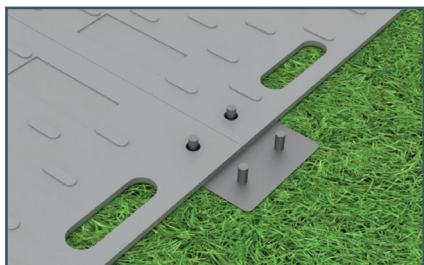

When using the Heavy Duty coupler, place the back plate behind the EnduraMats, feeding the bolts through the Enduramat holes.




Do this for up to four EnduraMats. Place the front plate on top and secure with nuts.

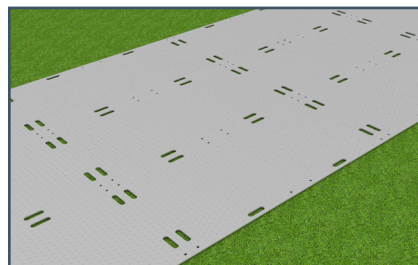

Repeat until the area is covered.



## RECYCLABILITY

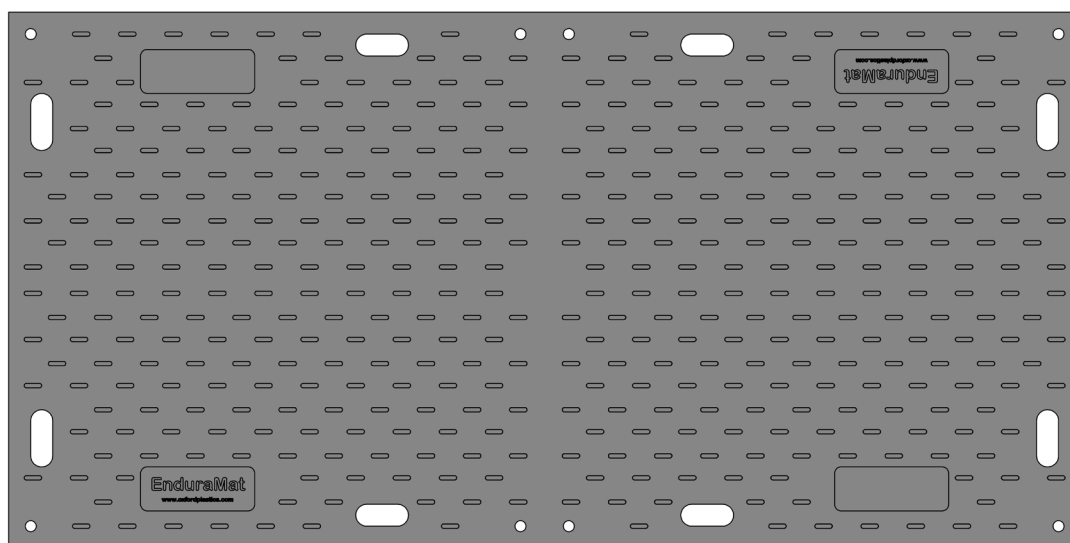

### MATERIALS

EnduraMat is made from HDPE and is fully recyclable.

EnduraMat is also available in up to 100% recycled material.

Contact Oxford Plastics for returning end of life products.





## ASSOCIATED PRODUCTS

When setting up a street works site, other Oxford Plastics solutions can be used to ensure compliance is achieved. Browse our Chapter 8 solutions; including advanced barrier systems, trench covers, road plates, wheelchair ramps and street works signs.



**ADVANCED  
BARRIER SYSTEMS**




**PORTABLE  
GATE BARRIERS**




**STREET WORKS  
SIGNS**



**WHEELCHAIR  
RAMPS**

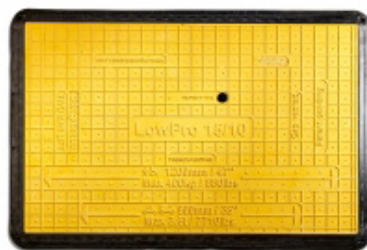

**TRENCH  
COVERS**

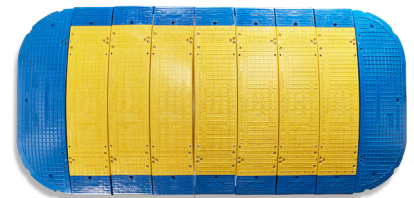

**ROAD  
PLATES**



## CONTACT INFORMATION

### DESARROLLOS EMPRESARIALES NEBRIJA SL

Pol Valldoriolf – C/ Noria, 9 08430  
La Roca del Vallés Barcelona –  
España

**Email: [info@densl.com](mailto:info@densl.com) Tel: +34  
630181945**

